



Picture may vary from actual product

## Power.Cash Power.Cash 'Touch-Plus'



The super-talent among payment machines.

The premium product among the SKIDATA parking payment machines is 'the pro' when it comes to multiple payment options and data carrier technologies! This is where operator comfort meets elegant design, high reliability and ease of serviceability. The 'Touch-Plus' model lets you enjoy not only a modern interface, but can allow you to take advantage of easily extended functionality.

### Professional ticketing

Whether customers want to pay by cash or card, or use one of a variety of data carrier formats, Power.Cash is well prepared for today and the coming years. It processes barcode, magnetic, and RFID technologies, offers Print@Home and is prepared for NFC solutions.

### Emphasis on reliability

A tested and proven coin mechanism, use of industry-standard components, UPS for uninterrupted operation, as well as both online and offline operating capability help to guarantee maximum readiness.



### Service made easy

Maximum success with minimum effort. Large ticket capacity, a large coin system, double ticket feeding with automatic switchover, a self-reloading coin system, and the use of a banknote recycler will help to make the operation easier for you.

### Elegant design and well-placed advertising

The payment machine scores with a high-quality design and plenty of space for advertising opportunities. Promote your business, search for collaborations and in this way, you can recover the costs for your devices.

all dimensions in mm

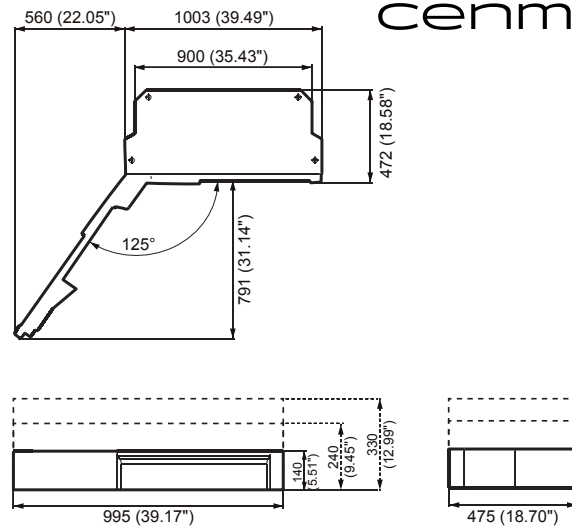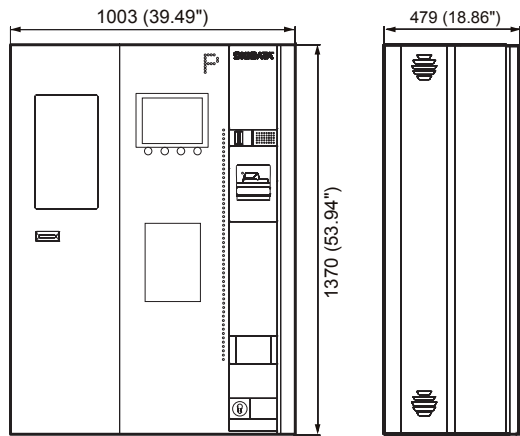

## Features

### Design/Structure

- Unique design based on steel, high-grade glass and high-quality plastics
- Backlit "P" parking space sign
- Large space for information labels (format ISO A4), e.g. tariff sheet
- Sufficient capacity for approx. 350 withdrawn paper tickets
- Illuminated change compartment with damped-motion cover
- Intercom system with adjustable volume and microphone
- Heater, cooling fan, and power supply unit
- Uninterruptible power supply can bridge up to 10 minutes

### Operation

- High-resolution color TFT display.
- Model Power.Cash: 26.4 cm (10.4") display with 4 backlit, maintenance-free softkeys with acoustic support
- Model Power.Cash 'Touch-Plus': 38.1 cm (15"), touch-screen display with intuitive user interface
- Innovative LED-based front panel illumination
- Intercom call button

### Cash handling system

- Electronic coin validator: accepts up to 16 different coins (including 2 programmable tokens)
- High coin storage capacity of self-releasing change bins (4 × approx. 1000 coins)
- Self-locking coin cashbox made from high-grade stainless steel

## Options

### Design/Structure

- Housing and light bar available in custom colours
- Three pedestal versions for different elevation of user controls
- Installation frames for optional expansion modules e.g. pin pad, fiscal printer, credit card terminal
- Uninterruptible power supply can bridge up to 25 min
- Digital intercom (optionally 2-wire or Ethernet-based)
- Double fanfold ticket intake (2 × approx. 3000 ticket blanks)
- Large ticket holding bin (approx. 1500 tickets)
- Illumination attachment (integrated "Parking" sign, coin and bill symbols, space for custom logo)
- Bag rest (depending on pedestal version used)
- Mechanical locks or system with configurable electronic locks

### Cash handling system

- Banknote validator SCN 83 with stacking container for up to 600 banknotes
- Banknote validator BNA 56/57 with stacking container for up to 1000 banknotes
- Double- or Triple banknote dispenser with stacking container for up to 500 banknotes per variety
- Bill-to-Bill banknote recycler with banknote stacking container for up to 1000 banknotes

### Coder/ticket technology

- Coder Unlimited for flexible ticket processing
- Coder Basic (crosswise barcode and punch-hole based validation)
- RFID module (for reading and coding of e.g. keycards)
- Print@Home scanner

## Technical Specifications

Dimensions	1003 mm × 1370 mm × 479 mm (w × h × d) / 39.49" × 53.94" × 18.86" (w × h × d) – without pedestal
Weight	up to 300 kg / 660 lbs (depending on equipment installed)
Power supply	230 V AC / 50 Hz; 120 V AC / 60 Hz
Power consumption	max. 250 W without heater; max. 1 kW with heater on
Operating temperature	-20 °C to +50 °C (-4 °F to +122 °F) (ambient temperature, when installed outdoors under a protecting roof without direct exposure to sunlight)
Default colors	RAL 9007 (gray aluminum) and RAL 9005 (deep black), pedestal RAL 7021 (black-gray)
Enclosure front panel	Powder coated, 2 mm (0.08") basic enclosure frame, powder coated door panel made from 3 mm (0.1") sheet steel
Supported data carrier formats	SKIDATA tickets for thermal print labelling, with/without magnetic stripe, SKIDATA ThermoPlast and ISO standard magnetic stripes, ISO 7816 compliant smart cards, contactless cards ISO 14443, ISO 15693 compliant cards Options for pay terminals: smart cards, EC cards, credit cards The functionality of integrated data carriers is provided subject to the individual system configuration.
Interface	Ethernet, 4 potential-free relay outputs, intercom station
PC	Industrial PC, Windows Embedded Standard 7 operating system, SQL database
Declarations / Certifications	Power.Cash: CE, FCC, IC, cNRTL-US (only 120 V variant), VdS, Ukr-Sepco Power.Cash 'Touch-Plus': CE, FCC, IC, cNRTL-US (only 120 V variant), Ukr-Sepco
Protection based on IEC 60529	IP43 if installed in protected location as described in the instructions for installation