
LF 125Khz - USB based

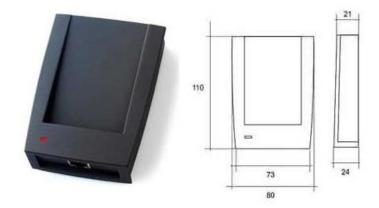

Specification

Type: Contactless Read 125KHz L

Working Frequency: 125KHz

Reading or writing standard charts: EM4001, Hitag-1, Hitag-2, Hitag-s

Reading Range: 5 - 8cm

Power Supply: 8 -18 V DC

Dining: USB

Audio/ Light Indication: Signal lamps, two LEDs

Operating Temperature: - 30C to +/-40 C

Body Material: ABS Plastic

Color Body: Matt Black

The Output Interface: USB

Size: 110mm * 80mm * 24mm

Uses & Applications: Applications include: Issuing System, E-Passport System,

E-Payment System, Developing COS, Campus or Institute System



